

SERIES 481 482 483




Foot pressure mat

- Impact detection
- Minimum operating pressure 1.5 kg
- Only 3.5 mm thick

Foot pressure mat that, thanks to its very low thickness, can be placed under carpets, runners, deep-pile carpets, etc. It is made of several layers of hardened and tinned steel strips divided by a thin insulating layer. When the mat detects a localized pressure higher than 1.5 kg, it closes the output contact. Wire connections. Available in different sizes. Version 482 is provided in 5 m long rolls that can be cut according to the required length.

GENERAL SPECIFICATIONS

Mat material	PVC, colors according to table
Contact elements material	Hardened and tinned steel
Operation	NO contact
Connection type	Wire
Operating temperature	-15°C to +55°C
Protection grade	(indoor)
Packaging	1 pcs./package

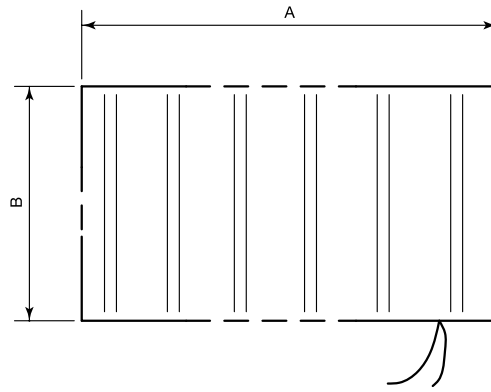

ORDER CODES

Code	Contact	Max. current	Max. voltage	Length A	Length B	Thickness	Connection	Color	Package weight	Notes
481	NO	500 mA	75V DC	350 mm	150 mm	3 mm	2 wires, 0.7 m long	black	0,90 kg	
481-1	NO	500 mA	75V DC	450 mm	200 mm	3 mm	2 wires, 0.7 m long	black	0,12 kg	
482	NO	500 mA	75V DC	5000 mm	740 mm	3 mm	welding terminals	clear	3,43 kg	
483	NO	500 mA	75V DC	745 mm	425 mm	3,5 mm	2 wires, 0.7 m long	black	0,56 kg	reinforced PVC

482

